



MR300i

TUNE-UP INSTRUCTIONS



Part Nº	DESCRIPTION	QTY
0/000.060.5302	HOMOLOGATED LICENSE PLATE HOLDER MRT 2021	1
0/000.150.2100	TURN SIGNAL OVAL RIGHT-FRONT / LEFT-REAR	2
0/000.150.2200	TURN SIGNAL OVAL LEFT-FRONT / RIGHT-REAR	2
0/000.150.6001	LICENSE PLATE LIGHT LED 2018	1
0/000.160.9125	INSTALLATION SUPPLEMENT LAMBDA SENSOR MR 2025	1
0/000.220.9107	CHAIN GUARD APPROVED EC 2018	1
0/000.290.9107	GAS TANK OVERFLOW TUBE ENDURO	1
0/000.290.9153	EXHAUST MR 300 2025 HOMOLOGATED	1
0/000.290.9156	COPOLAN-NBR TUBE 05 x 010 x 60	1
0/000.340.0016	NUT DIN 6923 M6 Cal.6 WHITE ZINC	4
0/000.390.9115	HOMOLOGATED PRESSURE STICKER FOR TIRES (ON SWINGARM)	1
0/000.420.5011	HORN CLASS II TYPE DL128J-12V	1
0/000.440.0026	FLAT WASHER DIN 9021 1.13 WHITE ZINC	2
0/000.440.0027	TOOTHED WASHER DIN 6798/J M3 Cal.A2 STAINLESS STEEL	2
0/000.440.9102	CLIP 02110396 SRRM-5 CATADIOPTRIC	2
0/000.460.0059	SCREW DIN 912 Allen M3x10 Ca1.8.8 WHITE ZINC	2
0/000.460.3000	SCREW ISO 7380 Torx T-30 with pin M6x16 Cal.A2 STAINLESS STEEL	1
0/000.460.9108	SPECIAL SCREW 6X12 + WASHER AND RETAINER ISO 7380-2 STAINLESS	1
0/000.460.9156	ULS 6x16 ISO 7380-1 BLACK 12.9	4
0/000.460.9194	SPECIAL SCREW DIN 6921 Hex.10 TX40 M8x25 Ca1.10.9 GEOMET	1



Part Nº	DESCRIPTION	QTY
0/000.480.9102	STAND MOUNT SLEEVE ENDURO 2018	1
0/000.500.9103	SPROCKET Z-42	1
0/000.570.9102	GAS TANK OVERFLOW	1
0/000.570.9105	RESTRICTOR EC HOMOLOGATED 2018	1
0/000.570.9106	RESTRICTOR REAR AIR FILTER ENDURO 2018	1
0/000.630.1003	PLASTIC "Y" CONNECTOR YS 5 05	1
0/000.630.9102	ADHESIVE CATADIOPTRIC (8159)	2
0/000.630.9103	CATADIOPTRIC 700R ENDURO 2007	1
0/000.630.9105	CRANKCASE VENT ME25610012	1
0/000.640.0002	AIS VALVE ASSEMBLY BI-DIRECTIONAL IN/OUT	1
0/000.640.5023	INLET HOSE AIS VALVE MRT 50 (FILTER BOX/V.AIS)	1
0/000.640.5024	OUTLET HOSE AIS VALVE MRT 50 (AIS / EXHAUST)	1
0/000.980.9100	IGNITION SWITCH BRACKET ENDURO 2018	1
0/000.980.9107	HORN MOUNT ENDURO 2018 ZINCED	1
0/000.990.9100	MIRROR KIT (REG 81)	1
0/001.050.9102	GSX CHAIN WITH ENG A.	1
0/001.060.9100	IGNITION SWITCH J20.49C TRLAL 2002	1
0/227.013.0003	AIS VALVE FILTER	1
0/001.010.4003	LAMBDA SENSOR	1
T0806020	SPECIAL SCREW PLASTIC THREAD HEXAGONAL HEAD	2




1. Remove holder supplement of the homologated license plate as well as front and rear side indicators, catadioptrics and license lamp.




2. Remove homologated exhaust as well as AIS valve and the electric wiring of lambda sensor (A). Mount the non homologated exhaust and place the tap on the lambda sensor connector. (B).



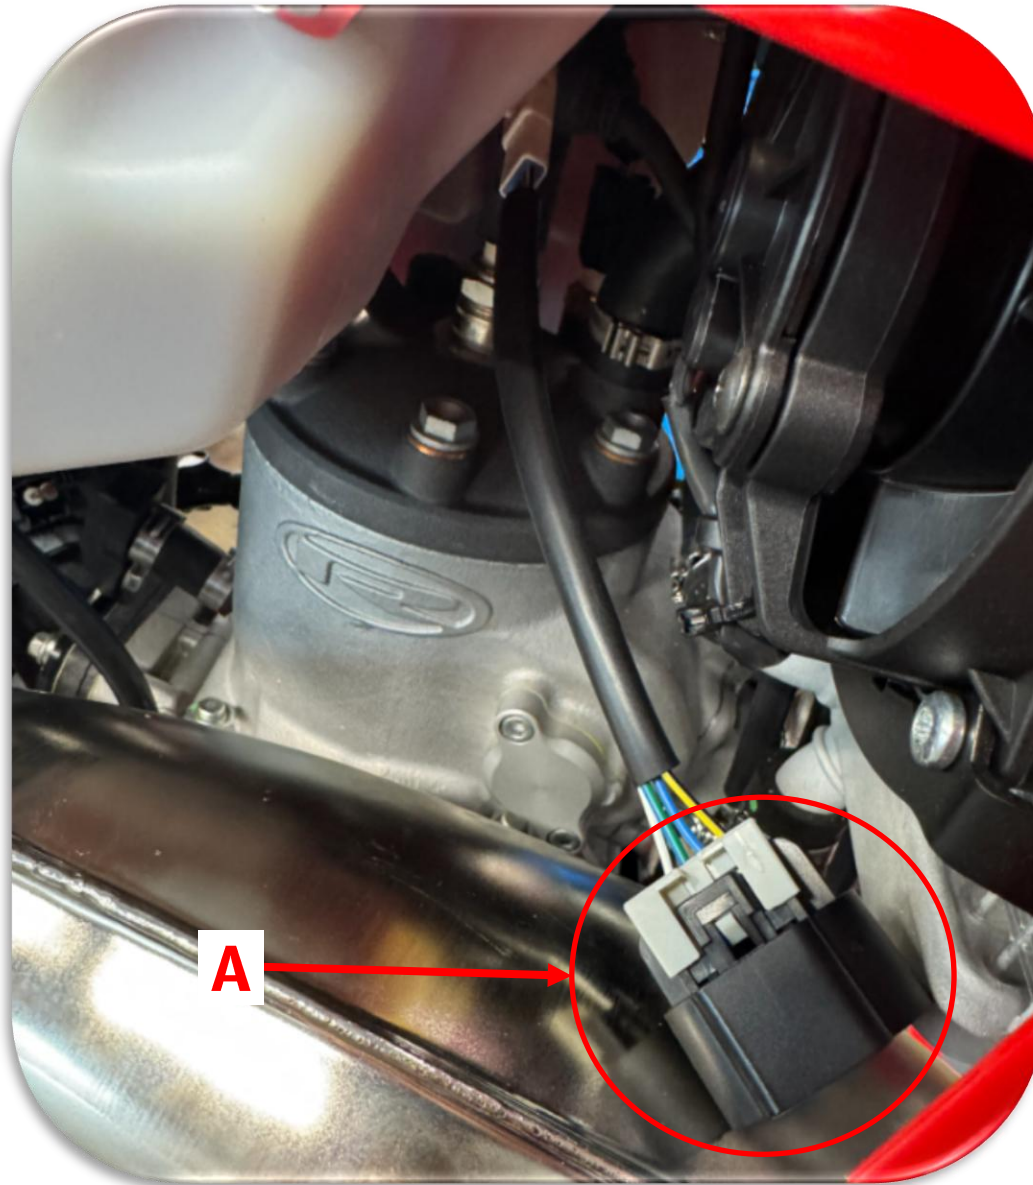

PROPRIETARY INFO: The documents and the information contained herein are proprietary and are not to be reproduced, used and disclosed to others for manufacture or for any other purpose except as specifically authorized.



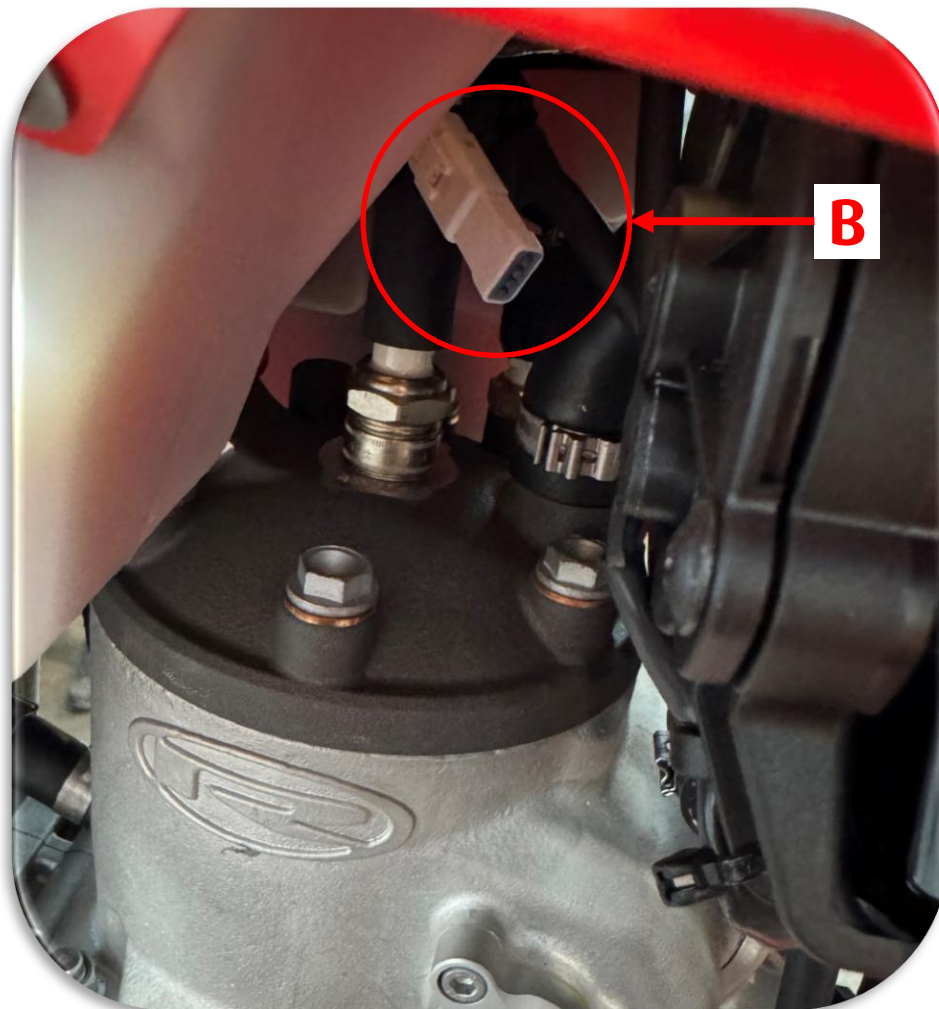

3. Remove the homologated sprocket, chain and chain protector. Mount the non-homologated sprocket and chain.



4. Remove the petrol tank overflow.



PROPRIETARY INFO: The documents and the information contained herein are proprietary and are not to be reproduced, used and disclosed to others for manufacture or for any other purpose except as specifically authorized.



5. Remove horn.



PROPRIETARY INFO: The documents and the information contained herein are proprietary and are not to be reproduced, used and disclosed to others for manufacture or for any other purpose except as specifically authorized.



6. Replace sleeve and screw from homologated side stand with sleeve and screw of non-homologated kit.

Note: Change the o-ring from one sleeve to another.


Tight screw at **28 Nm** with loctite (**Loctite 243**).



7. Remove the air filter restriction.



8. Uninstall the set of devaporizers that are connected to the intake nozzle and plug with the screw.
- Disconnect the pipes from the connector (C) and place the 2 pipes of the engine breather in place.

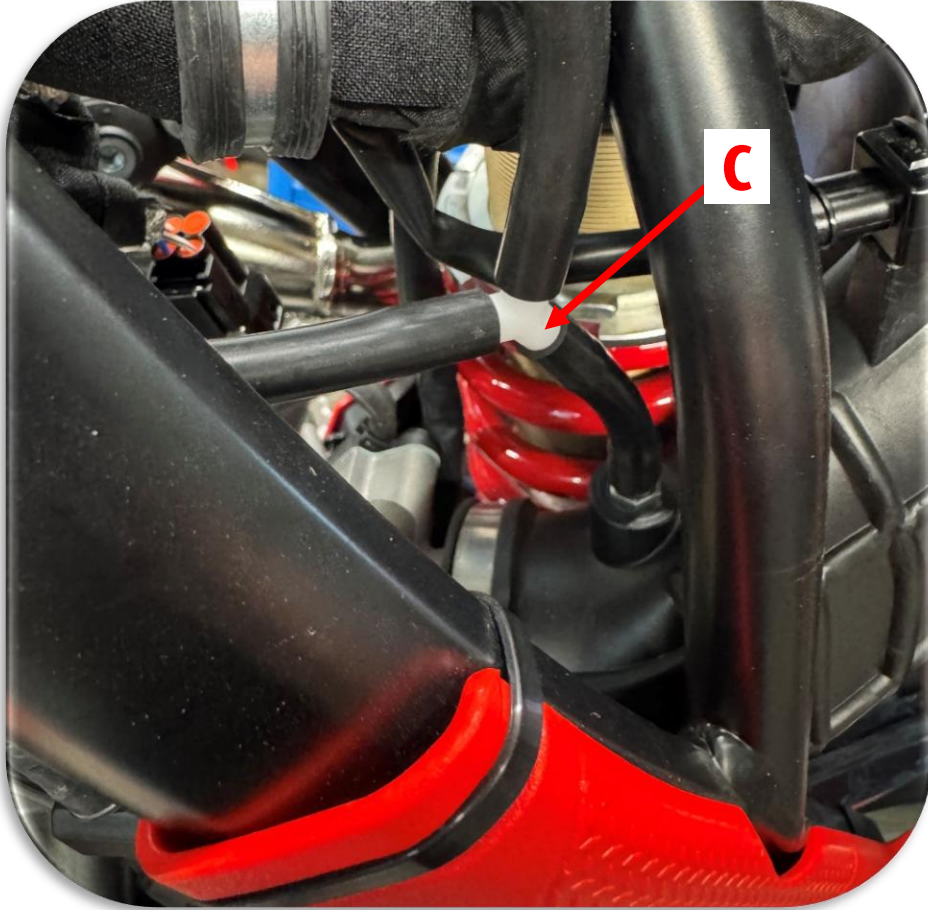

9. Disassemble the steering lock assembly with anti-tampering pin.



10. Remove the two catadioptrics from the front fork.

